

ANALYTICAL STUDY OF MASONRY-INFILLED RC FRAMES RETROFITTED WITH ECC

Fariborz NATEGHI-A¹, Mohammad Hossein AHMADI², Ayoub DEGHANI³

ABSTRACT

Vulnerability of many buildings with masonry infilled frames in the past earthquakes shows that a large number of existing buildings need to be strengthened using an effective, compatible, and applicable approach. However, they were designed based on modern codes. One of the effective materials in strengthening is high performance fiber reinforced cementitious composites (HPFRCC) which has been developed as a strengthening overlay on masonry infill walls recently. In this paper, the numerical modeling of masonry infilled reinforced concrete (RC) frame is carried out before and after strengthening with a special kind of HPFRCCs called Engineered Cementitious Composites (ECC) using DIANA FEA software. Numerical modeling of the specimens is defined based on macro modeling approach, considering the infill panel as a homogenous material and interface elements to simulate the behavior of interface between the frame and the infill as well as the ECC layer and the infill. The results illustrate that the ECC layer increases stiffness and strength of infilled framed in calibrated model. Furthermore, interface elements show the various failure mechanisms of the infill wall, RC frame, and ECC layer in strengthening with this technique.

Keywords: Masonry infilled frames, Engineered Cementitious Composites, Numerical modeling, Strengthening

1. INTRODUCTION

Many reinforced concrete (RC) structures with inadequate lateral strength and ductility exhibited weak seismic performance all around the world due to various defects such as flexible columns, soft stories, weak column-strong beam connections, insufficient concrete confinement, and non-seismic reinforcement detailing [1]. Although RC structures, designed based on modern codes, have a good capacity to withstand under seismic loads, nonstructural elements as masonry infills show a high degree of damage even for medium magnitude earthquakes, causing casualties and high economic losses [2, 3]. On the other hand, infill walls can be used to strengthen RC frames. However, their potential vulnerability under in-plane and out-of-plane loading make a serious challenge in retrofitting by using infill walls. Thus the use of existing masonry panels in a strengthening scheme for RC structures is an interesting solution, if one can avoid the failure modes of masonry panels

A number of methods were proposed in the literature to strengthen infilled concrete frames by enhancing the in-plane shear behavior of infill panels such as using cast in situ or precast RC infill walls [5-6], applying reinforced plaster layers [7], and shotcreting masonry infill panels [8] to increase stiffness and lateral strength of infilled RC frames and reduce the lateral drift at the

¹Professor, Department of Structural Engineering, International Institute of Earthquake Engineering and Seismology (IIEES), Tehran, Iran. nateghi@iiees.ac.ir

²PhD Candidate, Department of Structural Engineering, International Institute of Earthquake Engineering and Seismology (IIEES), Tehran, Iran mha8899@yahoo.com

³Lecturer, Persian Gulf University, Boushehr, Iran Iran deghani@pgu.ac.ir

ultimate load. Another technique proposed and tested by experimental studies [9] is the use of fiber reinforced polymers (FRPs). The experimental results have shown the noticeable improvement in lateral strength and energy absorption capacity if adequate anchors are provided to attach FRP sheets to the masonry wall as well as to the corners of the surrounding RC frame. Recently, ECC overlay strengthening system was proposed to strengthen masonry panels and the obtained results have shown that ECC can induce an increase of about 1.5 -2.8 times for the shear strength [10]. ECCs are a special kind of high-performance fiber-reinforced cement-based composite materials (HPFRCCs) which are typically reinforced with short fibers and micromechanically tailored to feature high tensile ductility and multiple cracking [11].

The aim of this paper is carrying out the numerical modeling of masonry infilled reinforcement concrete frame before and after strengthening with ECC using finite element modeling through the DIANA FEA 10.1 software [12]. It is obvious that the numerical modeling can provide a better understanding of the exact behavior of infilled RC frame before and after applying ECC. Therefore, it is a need to introduce the numerical model and calibrate it by the experimental results.

Generally there are two approaches to simulate the behavior of the masonry wall, namely macro and micro modelling approaches. In the Macro modelling approach, infill is replaced by equivalent diagonal strut [13]. The single diagonal strut method is simple and capable of representing the global behavior of the infill but it cannot predict local effects in the infill resulting from the interaction between infill and frame. In the micro modelling approach, finite element method is used to simulate the infill panel for a better understanding of the local behavior of the infilled frame. There are three different approaches to model the infill in micro modelling approach, namely detailed micro model, simplified the micro model and macro model by considering a masonry as homogenous and isotropic [14]. In the detailed micro modelling approach infill panel is modelled as a set of three different components: brick, mortar and interface between mortar and brick. In the simplified micro model, infill is modelled as a set of two different elements: expanded brick and interface elements. Interface elements represent the behavior of mortar and also the interface between mortar and brick.

In this paper, numerical modeling was defined by using macro modeling approach and considering interface elements to model the behavior of interface between masonry infill and ECC layer on it. However, the infill panel was considered as a homogenous material.

2. NUMERICAL MODELING

To carry out the objectives of this study, a calibration of a finite element model was done. In the software based on the previous experimental results obtained from the in-plane quasi-static cyclic tests on masonry infilled RC frames [15]. The test specimens were half scale one-bay, one story, representing the interior bay at the bottom story of the prototype frame. In the experimental program three different test specimens were considered, as illustrated in Table 1. The mechanical properties of materials are represented in Table 2 and a general overview of the reinforcement details and geometry of the RC frame are represented in Figure 1.

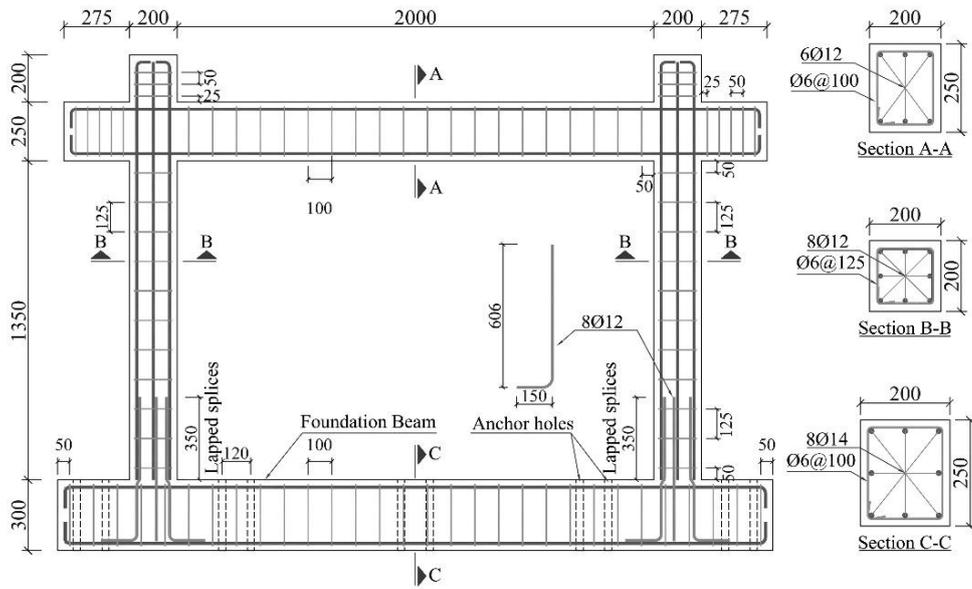


Figure 1. Specimen dimensions and reinforcement details (in mm) [15]

Table 1. Properties of test specimens

Specimen	Type of Frame	Components
BF	Bare Frame	Concrete Reinforcement Bars
IF	Masonry Infilled Frame	Concrete Reinforcement Bars Brick
IF-DL15	Masonry Infilled Frame with ECC layers on both sides of the infill wall	Concrete Reinforcement Bars Brick 15 mm ECC Layer

Table 2. Mechanical properties of the infilled frame's components

Mechanical Properties	Concrete	Masonry	Reinforcement bars
Elastic Modulus	32	6.05 (perpendicular to the bed joints (GPa))	210
Poisson's ratio	0.16	0.13	-
Compressive Strength (f_c , f_m) (MPa)	BF: 35.5 IF: 40.1 IF-DL15: 35.9	11	-
Tensile Strength (f_r) * (MPa)	BF: 4.2 IF: 4.45 IF-DL15: 4.2	1.1	-
Yield Stress (MPa)	-	-	Diameter 6: 302 Diameter 12: 370.1 Diameter 14: 463.8

* calculated based on $f_r = 0.7\sqrt{f_c}$ for concrete and 10% of compressive strength for masonry

The numerical model of the specimens was defined by using macro modelling approach and considering the infill panel as a homogenous material as described before. Masonry infill and concrete frame were modelled by using four-noded shell elements. Reinforcement was added to the concrete frame by embedding them to the concrete elements. Interface elements of (2+2) noded were used to model the behavior of the interface between masonry infill and reinforced concrete frame. The mesh adopted for the RC frame is shown in Figure 2. At first, the calibration of the bare frame model was done based on the experimental lateral load-displacement curve to verify the behavior of the concrete frame and reinforcement bars. A total strain fixed-crack constitutive model was adopted for masonry and concrete material in which the tensile and compressive behavior of the materials can be directly introduced with user-defined stress-strain relationships. In addition, multi surface interface model of “combined cracking-shearing-crushing” is used to simulate fracture, frictional slip as well as crushing along the interface. A vertical load of 132 kN was applied to the top of the columns in the numerical model in accordance to what was considered in the experimental program to simulate the weight of the upper stories. Three translations and three rotations of the bottom beam and also out-of-plane translations of the upper beam were fixed to simulate the constraints of the RC frame in a manner similar to the test procedure.

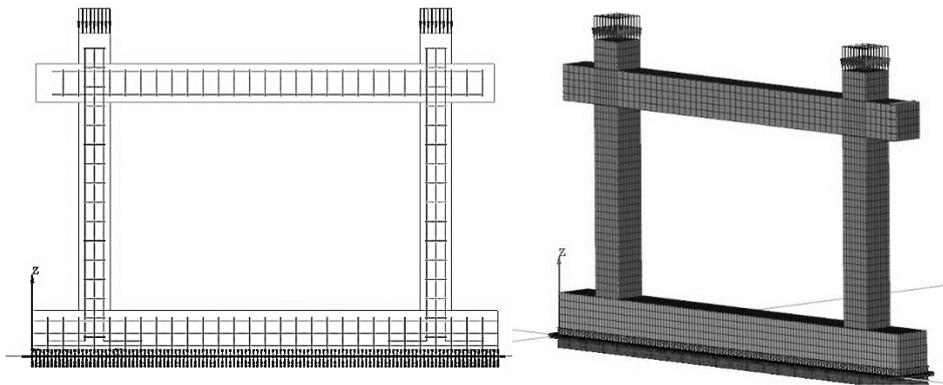


Figure 2. The adopted mesh of the finite element model of the test specimens

3. ANALYSIS OF RESULTS AND DISCUSSION

In the first step, the bare frame (specimen BF) was modeled, considering embedded bars with no bond-slip effects. As shown in Figure 3-a, the lateral force-displacement curve of the calibrated numerical model of specimen BF shows a reasonable agreement with experimental results in the general trend of response as well as in the maximum strength. In this figure, “Test+” and “Test-” represent the envelop curve of a tensile and compressive branch of the experimental hysteretic graph, respectively, taken from [15]. It should be noted that the lateral loading protocol developed by FEMA [16] had been selected in the experimental tests because of its step-wise increasing deformation amplitude which allows of defining more cycles in the small and moderate drift ranges and reducing the number of cycles in large lateral drifts. Figure 3-a indicates that the numerical model can predict accurately the initial stiffness of the experimental test specimen. Afterwards, the model shows slightly a higher stiffness in comparison to the experimental results. This difference can be attributed to the bond-slip effect which has not been considered in the finite element model due to software limitations. Bond-slip that represents the slip between the rebar and the surrounding concrete increases the flexibility of concrete frame. Comparison between the response of RC model with and without considering bond slip has been frequently reported in the literature (e.g. [17]). Figure 3-b taken from [17] shows how considering the bond-slip effect reduces the numerical model’s stiffness. Furthermore, this study has shown that the bond-slip modeling does not affect the response of the masonry infilled frame because the ductility of the infilled frame is lower than that of the bare RC frames and therefore the former does not experience large slipping between bars and concrete before collapse [17].

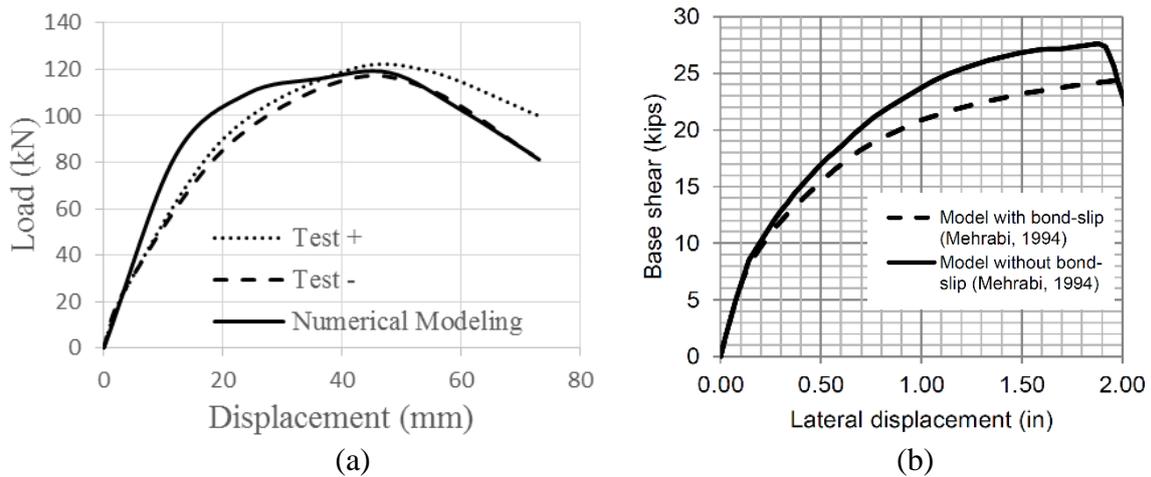


Figure 3. a- comparison of the numerical lateral force-displacement curve with the monotonic experimental envelop of BF specimen, b- Effect of modeling the bond-slip on the response of the bare frame using data from [17]

In the next step, the masonry infilled frame (specimen IF) was modeled. To simulate the contact behavior between the infill wall and surrounding frame, interface elements were introduced in those areas. The mechanical properties of interface material were calculated based on the formula's proposed by Al-Chaar and Mehrabi [18] and obtained by validating the numerical lateral force-displacement curve of IF specimen in comparison to the experimental curve and Tabulated in table 3.

Table 3. Mechanical properties of the interface elements

Parameters defined in interface model	Definition	Values
K_{nn}	Normal stiffness modulus (N/mm^3)	3
K_{ss}	Shear Stiffness modulus (N/mm^3)	1.6
f_t	Tensile strength (Mpa)	0.5
G_f^I	Fracture Energy for Mode-I (N/mm)	0.03
C^*	Cohesion (Mpa)	0.02
Φ^*	Internal friction angle (radian)	0.078
ψ	Dilatancy angle (radian)	0.005
ϕ_r^*	Residual friction angle (radian)	0.075
σ_u	Confining normal stress (Mpa)	-0.75
δ	Softening parameter (dilatancy degradation coefficient)	2.3
G_f^{II}	Fracture energy for Mode-II (N/mm)	0.75
f_c	Compression strength (Mpa)	5
C_s	Shear traction contribution to the failure	1
G_{fc}	Compressive fracture energy (N/mm)	4
κ_p	Relative plastic displacement at peak compressive strength (mm)	0.15

* obtained parameters by validating the numerical modeling based on experiments

The main results obtained from IF model is shown in Figure 4. It can be stated that the lateral force-displacement curve of the validated numerical model roughly coincides with the test results. figure 4-a proves that the model succeeds to predict the initial stiffness and load carrying capacity of the brick infilled frame as well as the descending branch of load-displacement curve. At small lateral drifts, masonry infill and its surrounding frame act as monolithic load resisting system. However, by increasing the lateral drifts masonry infill separates from its bounding frame and

forms a diagonal strut as shown in Figure 4-b to withstand the applied load. Separation of the masonry from RC frame occurred in the left upper corner at a lateral load of 90kN, it separates in right bottom corner at the lateral force of 150kN.

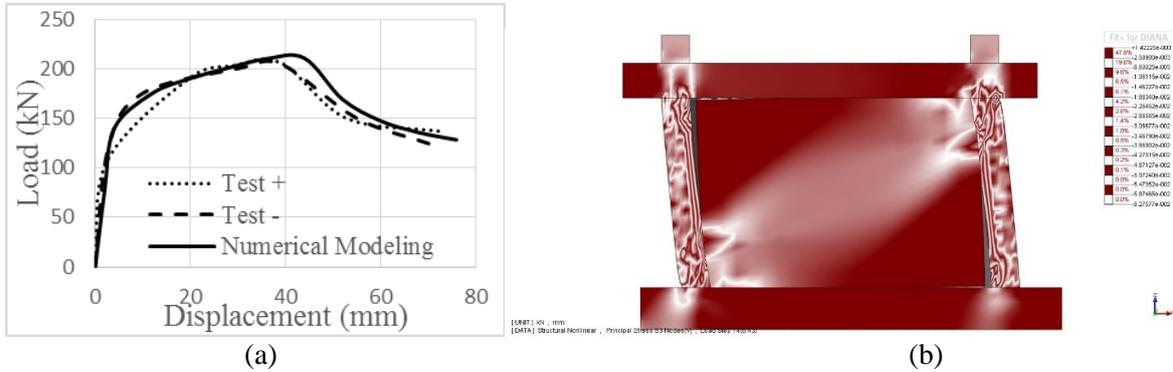


Figure 4. a- comparison of the numerical force-displacement diagrams with the monotonic experimental envelop of IF specimen b- distribution of principal stress within the infilled frame

In the last step, Specimen IF-DL15 was modeled, considering interface elements between the infill wall and ECC retrofitting layers. In order to model ECC material, the compressive and tensile stress-strain behaviour of ECC, were introduced directly to the numerical model. These were found as the average results of uniaxial compressive and tensile tests on cylindrical and dog-boned shape specimens, respectively, as shown in Figure 5. The ECC cylinders had been exhibited an average compressive strength of 47 MPa at a strain level of 0.55% and the tensile specimens had been shown an average crack strength of 2.45 MPa and strain capacities from 3.3% to nearly 4.7% during the tests [15].

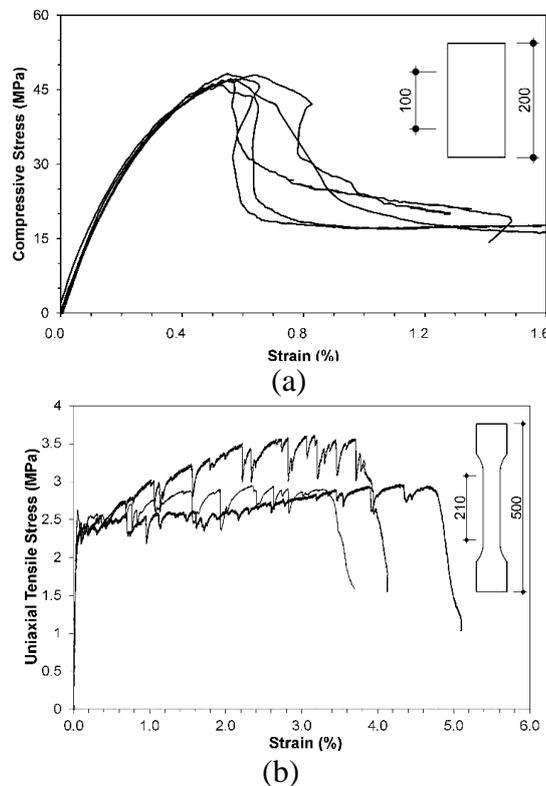


Figure 5. a- Compressive behavior of ECC, b- Stress-strain behavior of ECC in tension [15]

The experimental envelope curve of specimen IF-DL15, shown in figure 6-a, reveals that the retrofitted infilled frame has an elastic behavior up to 1.8 mm lateral displacement corresponding to a load of 100 kN. The experimental study showed that in low lateral load, the cracks occurred in ECC layer and no cracks appeared in the RC frame as well as retrofitted infill wall. By increasing lateral displacement, the primary cracks formed at the column-infill wall interface and the nonlinear behaviour was initiated. In the next steps, flexural cracks in the columns and multiple cracking in the ECC layer were observed and masonry infill separates from its bounding frame and forms diagonal strut in ECC layer[15]. One of the main point in the cracks formation and failure mechanism is that the the ECC layer experienced multiple cracking and damages instead of masonry infill wall. The vulnerability of the ECC layer and masonry infill wall can be compared based on figure 7 and 6 at the final loading step. Also, the corner crushing occurred in masonry wall under ECC layer and the diagonal strut was not seen like the masonry infill wall before retrofit in IF specimen.

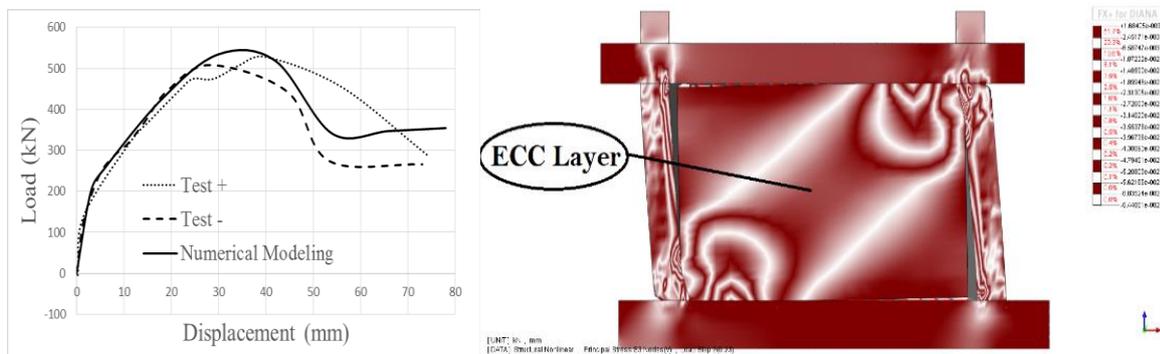


Figure 6. Comparison of numerical and experimental results for specimen IF-DL15

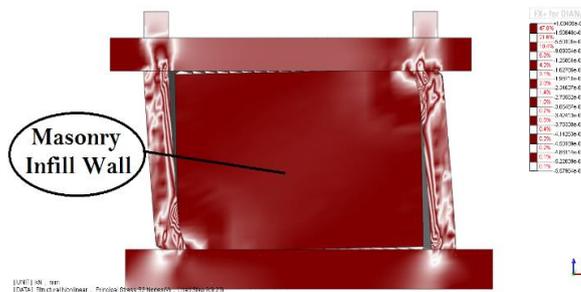


Figure 7. Distribution of principal stress within the infill wall under ECC layer

Conclusions

The numerical study presented in this paper focused on the issues involved in the numerical modeling of masonry infilled RC frames under in-plane lateral loads before and after strengthening by Engineered Cementitious Composites (ECC) material. A finite element modeling methodology is developed, calibrated, and validated with available experimental data. The proposed model combines the discrete and smeared crack approaches and considers the infill wall as homogeneous material to show all possible failure mechanisms And the smeared crack elements to simulate the cracking behavior of concrete, masonry wall and ECC layer. Furthermore, the model adopts the interface elements between the infill wall and frame as well as ECC layer. With the consistent calibration of this modeling approach, the various failure mechanisms of bare RC frame and

infilled RC frame before and after retrofitting are successfully captured. The conclusions can be summarized as follows.

- Since the bond-slip effect has not been considered in the model due to software limitations, the numerical model shows a higher stiffness after initial steps up to the peak point in comparison to the experimental result. However, the modeling of bond-slip does not affect the response of the infilled frame because the collapse of such system happens in relatively lower drifts in comparison to the bare frame and the bond slip does not occur up to these levels of drifts.
- The infilled frame showed 175% and 660% increase in the load carrying capacity and initial stiffness with respect to the bare frame, respectively. The initial stiffness of the infilled frame found to be much higher than that of the bare frame due to the presence of the infill wall.
- Homogeneous masonry material shows the diagonal strut in IF specimen, that can be used in macro models.
- The failure mechanism of masonry infilled RC frame changes after strengthening by ECC because the diagonal strut develops within the ECC layer rather than the brick wall.

Acknowledgements

The authors are grateful to International Institute of Earthquake Engineering and Technology (IIEES) for the supports in this research especially in experimental studies.

References

- [1] S. Altın, Ö. Anıl, M. E. Kara and M. Kaya, “An experimental study on the strengthening of masonry infilled RC frames using diagonal CFRP strips”, *Composites Part B: Engineering*, 39(4), 680-693, 2008.
- [2] V. Bertero, S. Brokken, “Infills in seismic resistant building”, *Journal of Structural Engineering (ASCE)*. 1983;109:1337–61.
- [3] G. Al-Chaar, M. Issa, S. Sweeney, “Behavior of Masonry-Infilled Nonductile Reinforced Concrete Frames”, *Journal of Structural Engineering*, 128:1055-63, 2002.
- [4] G.M. Sabnis, “Interaction Between Masonry Walls and Frames in Multistory Structures”, in *Proceedings of the First Canadian Masonry Symposium*, Calgary, Alberta, pp. 324-337, 1976.
- [5] MO. Sonuvar, G. O zcebe, U. Ersoy “Rehabilitation of reinforced concrete frames with reinforced concrete infills”, *ACI, Struct J*;101(4):494–500, 2004.
- [6] RJ. Frosch, W. Li, JO. Jirsa, ME. Kreger “Retrofit of non-ductile moment-resisting frames using precast infill wall panels”, *Earthq Spectra* 12(4):741–760, 1996.
- [7] S. Altın, Ö. Anıl, Y. Koprman and Ç. Belgin, , “Strengthening masonry infill walls with reinforced plaster”, *Proceedings of the ICE-Structures and Buildings*, 163(5), 331-342, 2010.
- [8] P. Teymur, S. Pala, E. Yuksel, “Retrofitting of vulnerable reinforced concrete frames with wet-mixed shotcrete panels”, *Adv Struct Eng* 15(1):1–14, 2012.
- [9] F. Nateghi Elahi, A. Dehghani, “Experimental behavior of brick-infilled concrete frames strengthened by CFRP with improved attaching technique”, In: *Proceedings of the 14th world conference on earthquake engineering*, Beijing, China, Paper ID: 12-03-0029, 2008.

- [10] A. Dehghani, G. Fischer and F. Nateghi Alahi. "Strengthening masonry infill panels using engineered cementitious composites." *Materials and Structures* 48.1-2, 185-204, 2015.
- [11] VC. Li, "Engineered cementitious composites Tailored composites through micromechanical modeling", In: Banthia N et al (eds) *Fiber reinforced concrete: present and the future*. CSCE, Montreal, pp 64–69.
- [12] DAIANA FEA BV., "Material Library User's Manual", Release 10.1, DIANA BV, 2017.
- [13] DV. Mallick, RT. Severn, "The Behaviour of Infilled Frames Under Static Loading", *ICE Proceedings*. p. 639-56,1967.
- [14] PB. Lourenço, "Computational strategies for masonry structures", [Diss, Technische Universiteit Delft,]. Delft: Delft University Press; 19, 1996.
- [15] A. Dehghani, " Engineered Cementitious composites for Practicable Strengthening of Masonry Infilled Reinforced Concrete frames", Ph.D. thesis, International Institute of Earthquake Engineering and Seismology
- [16] Federal Emergency Management Agency. FEMA 461. Interim protocols for determining seismic performance characteristics of structural and nonstructural components through laboratory testing. Redwood City, CA; 2007.
- [17] A. Mehrabi, "Behavior of Masonry-infilled reinforced concrete frames subjected to lateral loading", Ph.D. Thesis, University of Colorado-Boulder, 1994.
- [18] G. Al-Chaar, A.B. Mehrabi, "Constitutive Models for Nonlinear Finite Element Analysis of Masonry Prisms and Infill Walls", Final report of Construction Engineering Research Laboratory, ERDC/CERL TR- 08-19, March, 2008.